


# Customer Display LD520




## Features

- VFD with display 20 columns and 2 lines in 15\*16 dot
- Traditional Chinese, Simple Chinese, Japan (Hiragana), Korean for option
- Brightness up to 1000 cd / m<sup>2</sup>
- Display panel is movable to provide the best view angle
- User-defined and international character sets
- Pass through function, OPOS driver

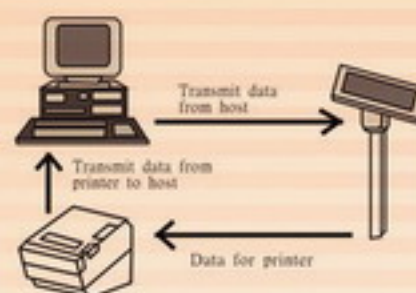

Pass through function

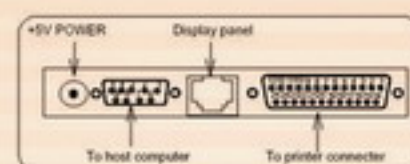

Connector Panel

## Specifications

Model	LD520
Customer Display	Vacuum Fluorescent Display Green
Display Pattern	15 x 16 dot matrix
Brightness	350~1000 cd / m <sup>2</sup>
Characters	95 Alphanumeric & 32 International Characters
Dot Size (X x Y)	0.3 x 0.47 mm
Font Size	6.5(W) x 9.8(H)
Character Number	20 x 2 for 15 x 16 dot font 20 x 4 for 5 x 7 dot font
Command	ICD-2002, EPSON POS D101, Aedex, UTC/S, UTC/P, ADM788, DSP800, CD5220
Language	USA, France, Germany, U.K., Sweden, Denmark I & II, Italy, Spain, Norway, Russian, Japan (Katakana), Slavonic,
Optional language	Traditional Chinese, Simple Chinese, Korean, Japan (Hiragana)
Pass-through function	standard
Dimension(Panel) (W x D x H)	225 x 50 x 92 mm
Dimension (Support)	(382/298/160/74) mm (H) x 33 mm (dia)
Dimension (base)	190 mm (W) x 96 mm (D) x 27 mm (H)
Viewing Angle	Max. 45°
Horizontal Rotation	Max. 340°
Weight	About 0.8 Kg
Interface	RS-232